


【書類名】

図面

【図1】


Fig. 1

Chiaki KUMADA, et al.  
 Q79644  
 GLOW PLUG ENERGIZATION CONTROL  
 APPARATUS AND GLOW PLUG ENERGIZATION  
 CONTROL METHOD  
 Filing Date: January 28, 2004  
 Darryl Mexic 202-293-7060  
 1 OF 10

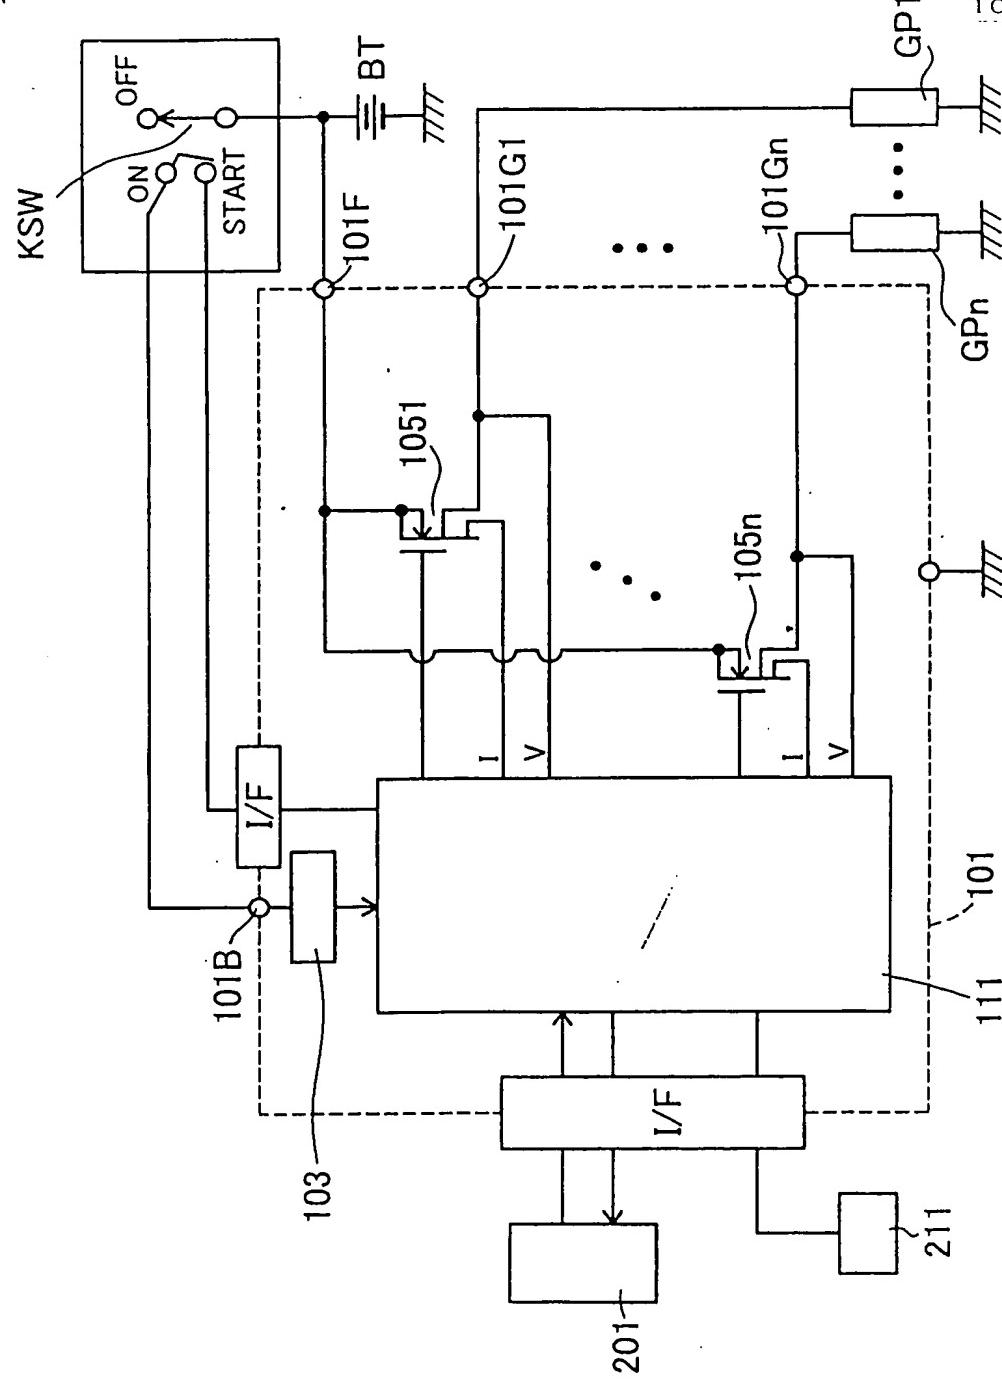

-図2-

Fig. 2

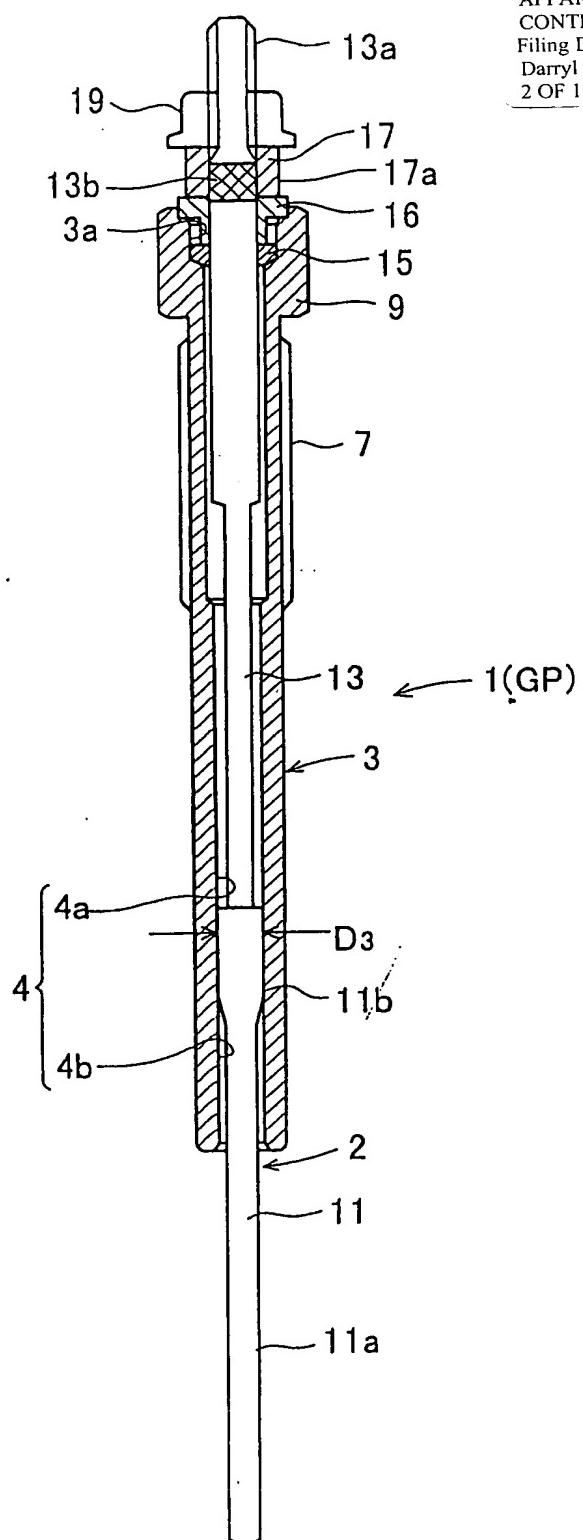

Chiaki KUMADA, et al. Q79644  
GLOW PLUG ENERGIZATION CONTROL  
APPARATUS AND GLOW PLUG ENERGIZATION  
CONTROL METHOD  
Filing Date: January 28, 2004  
Darryl Mexic 202-293-7060  
2 OF 10

提出日 平成15年 1月29日


整理番号=NT101456-1

頁: 3/ 10

【図3】

(a)

Fig.3A

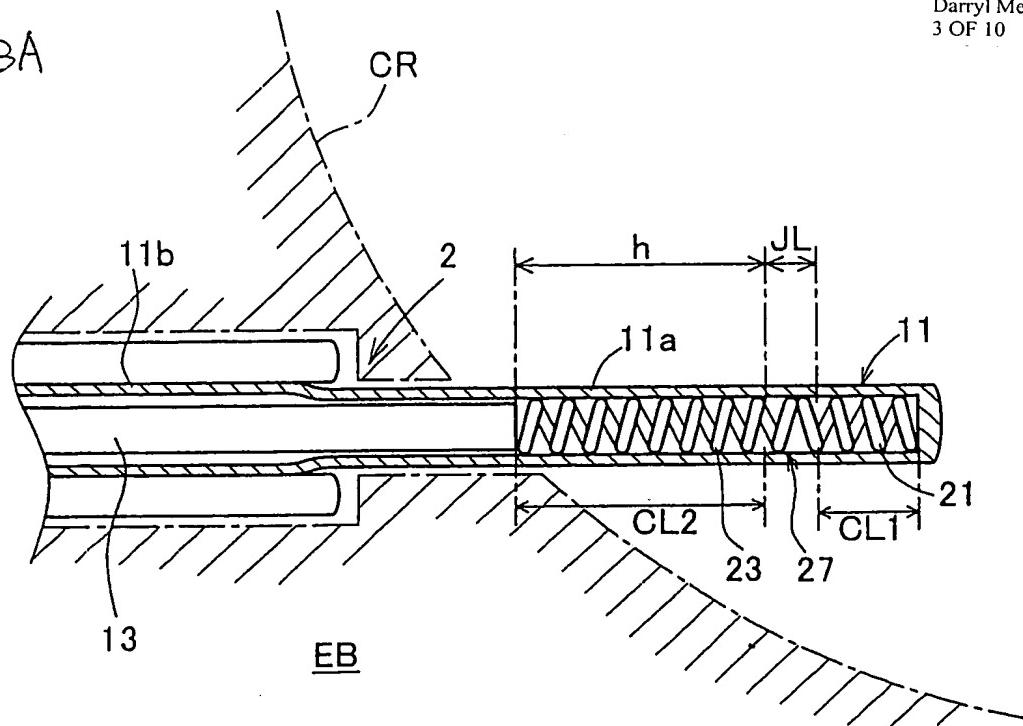


Chiaki KUMADA, et al.  
GLOW PLUG ENERGIZATION CONTROL  
APPARATUS AND GLOW PLUG ENERGIZATION  
CONTROL METHOD  
Filing Date: January 28, 2004  
Darryl Mexic 202-293-7060  
3 OF 10

Q79644

(b)


Fig.3B

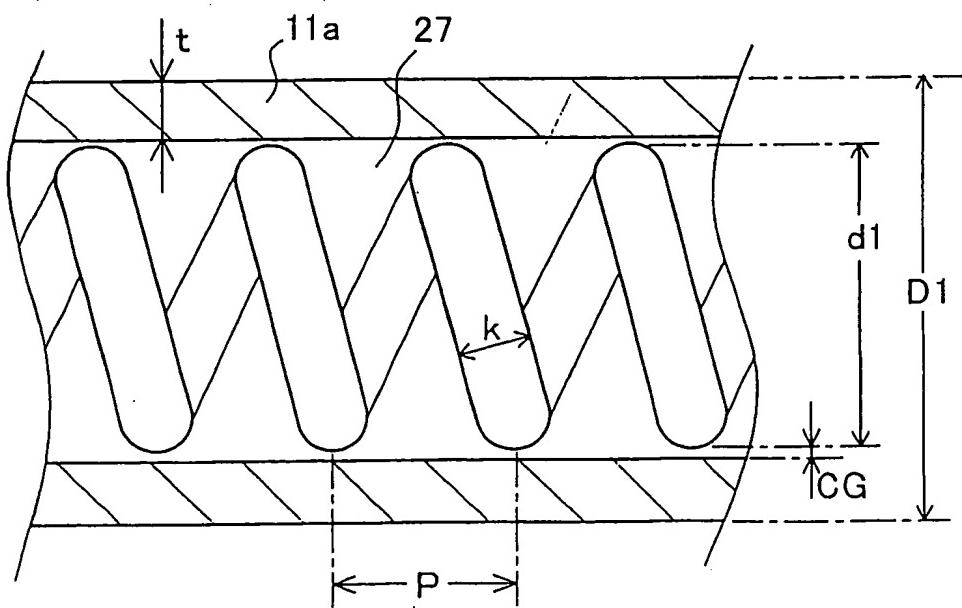

整理番号=NT101456-1


[図4]

Fig.4

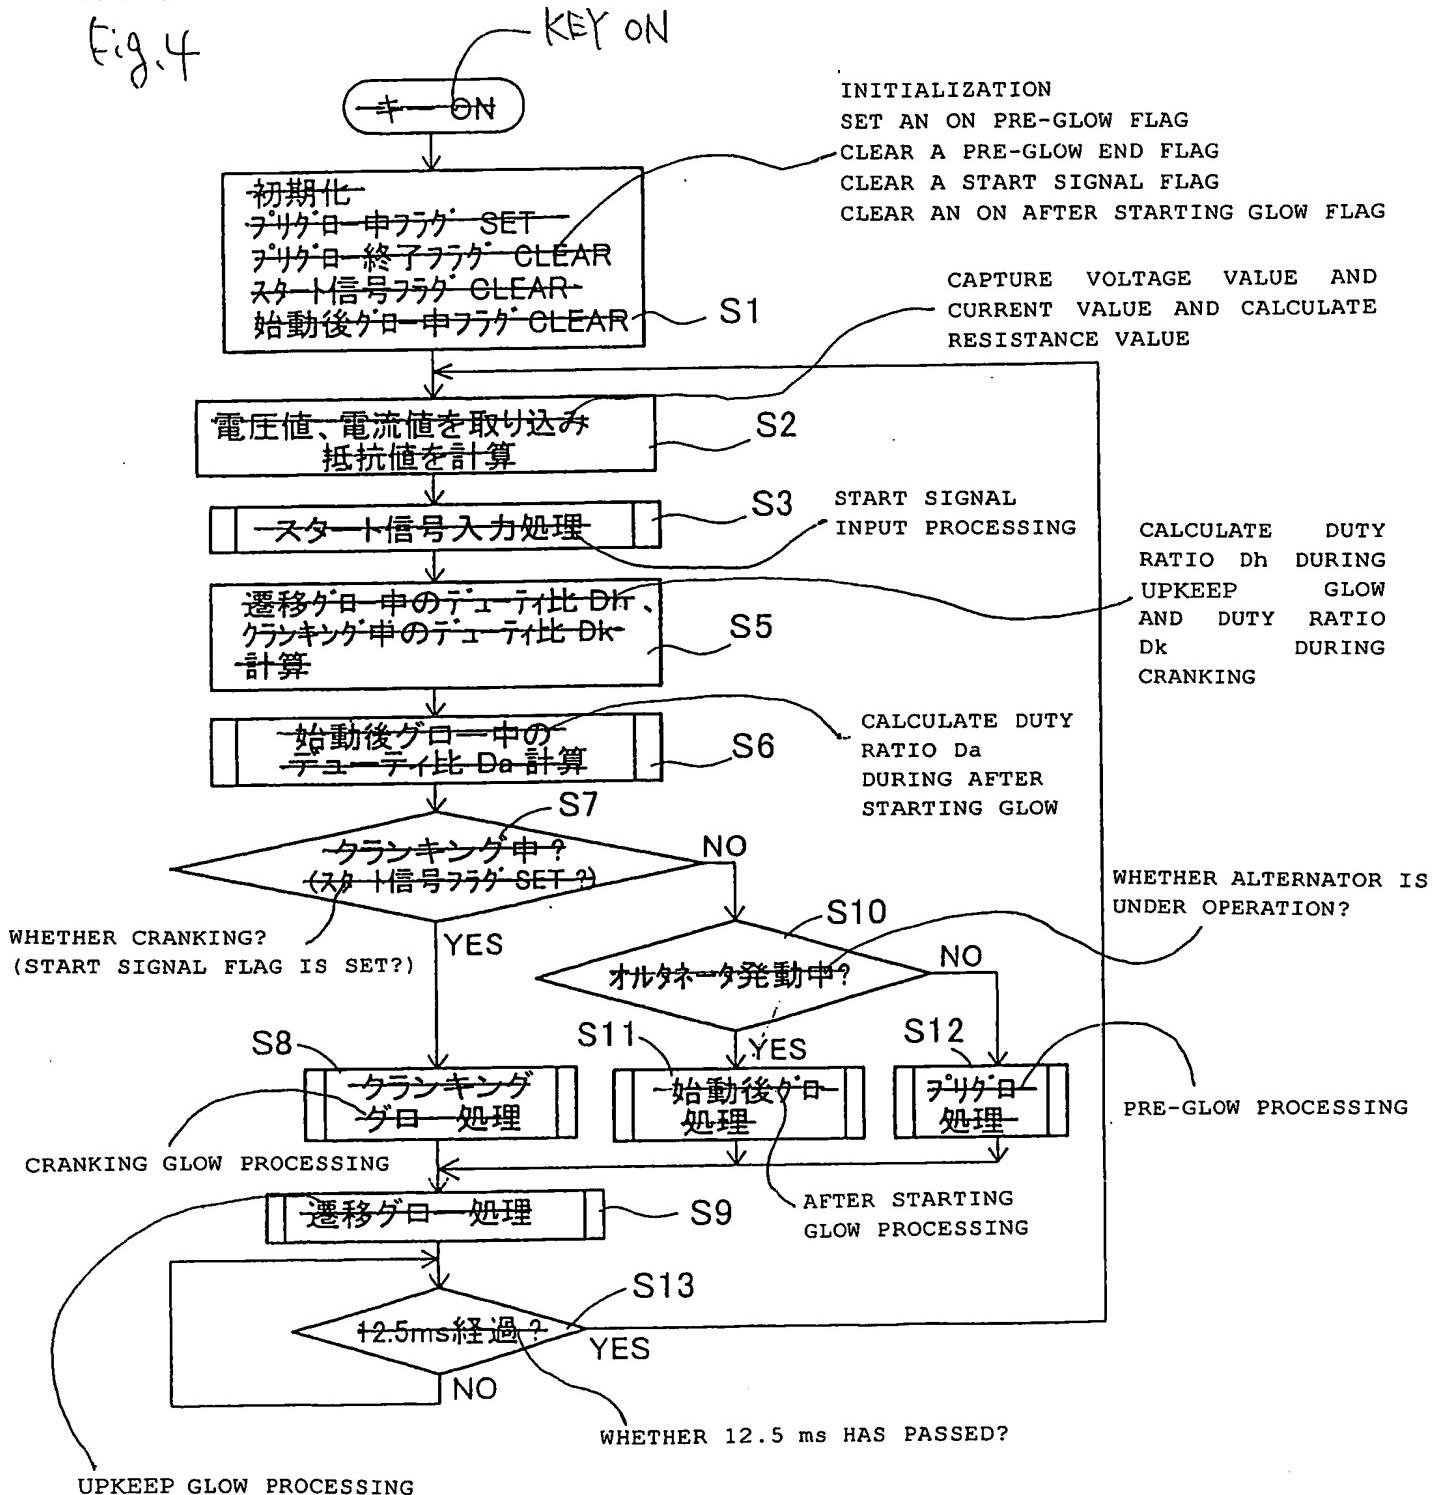

[図5]

Fig.5

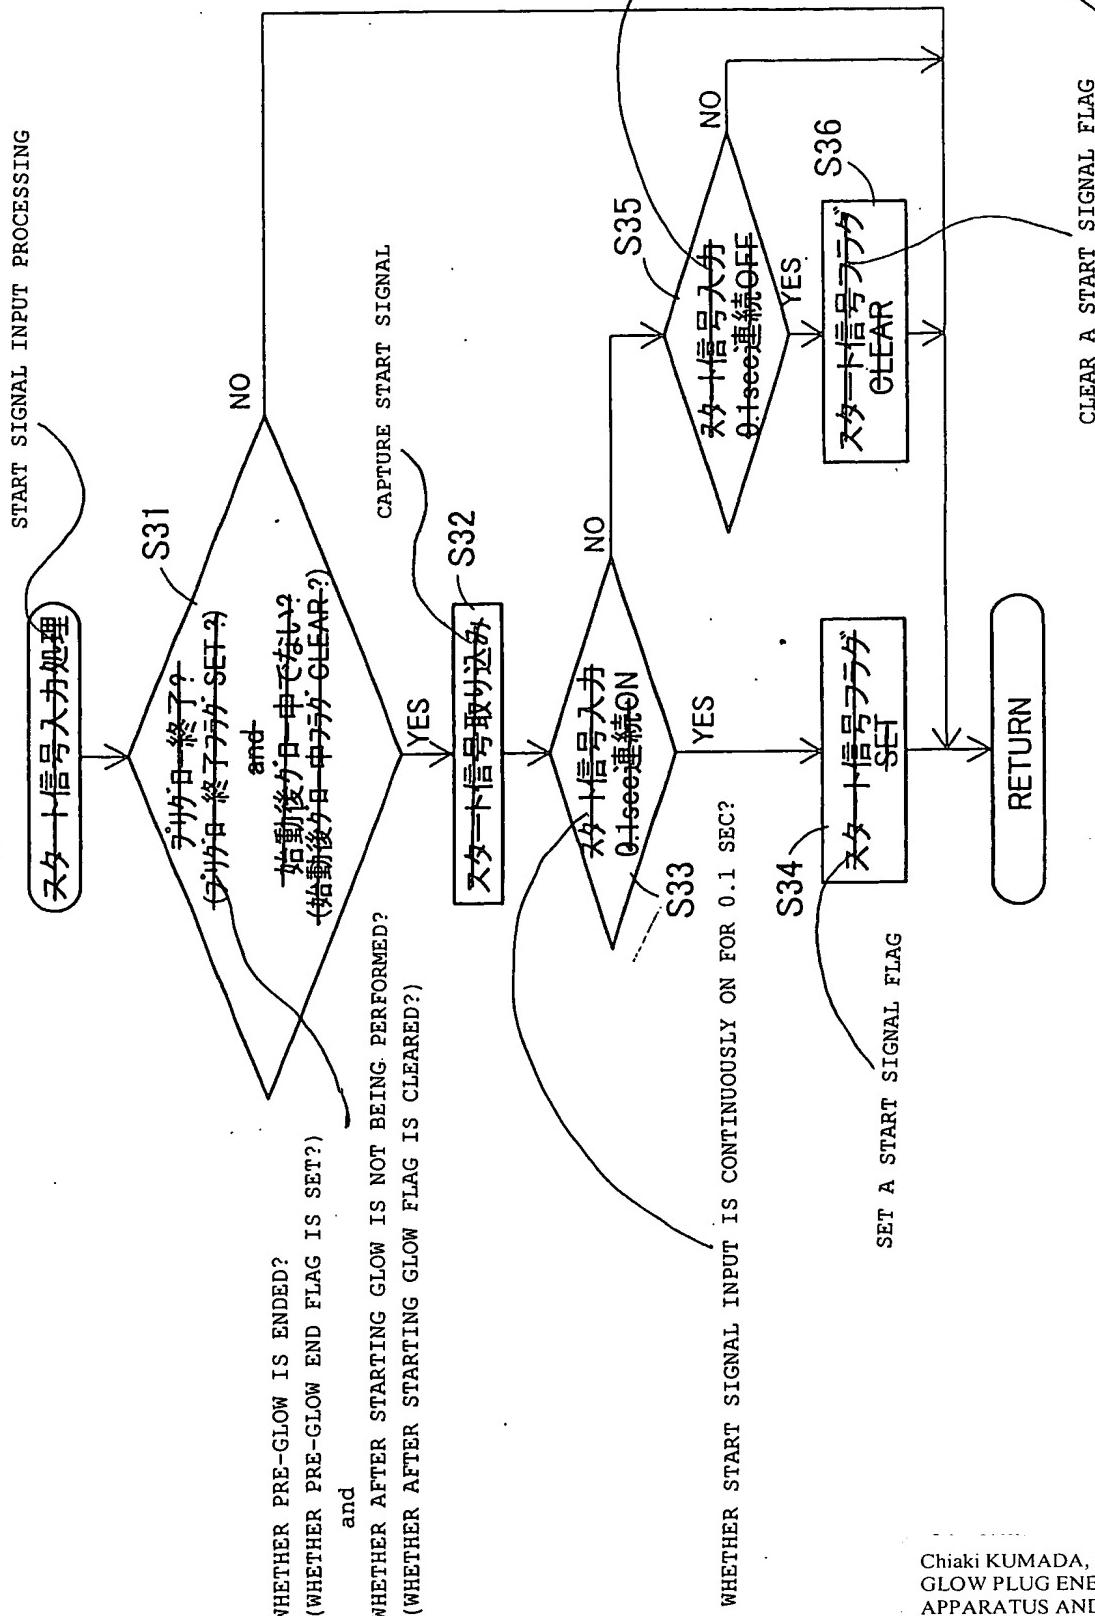


WHETHER START SIGNAL INPUT IS CONTINUOUSLY OFF FOR 0.1 SEC

【図6】

Fig.6


## CALCULATE DUTY RATIO Da DURING AFTER STARTING GLOW

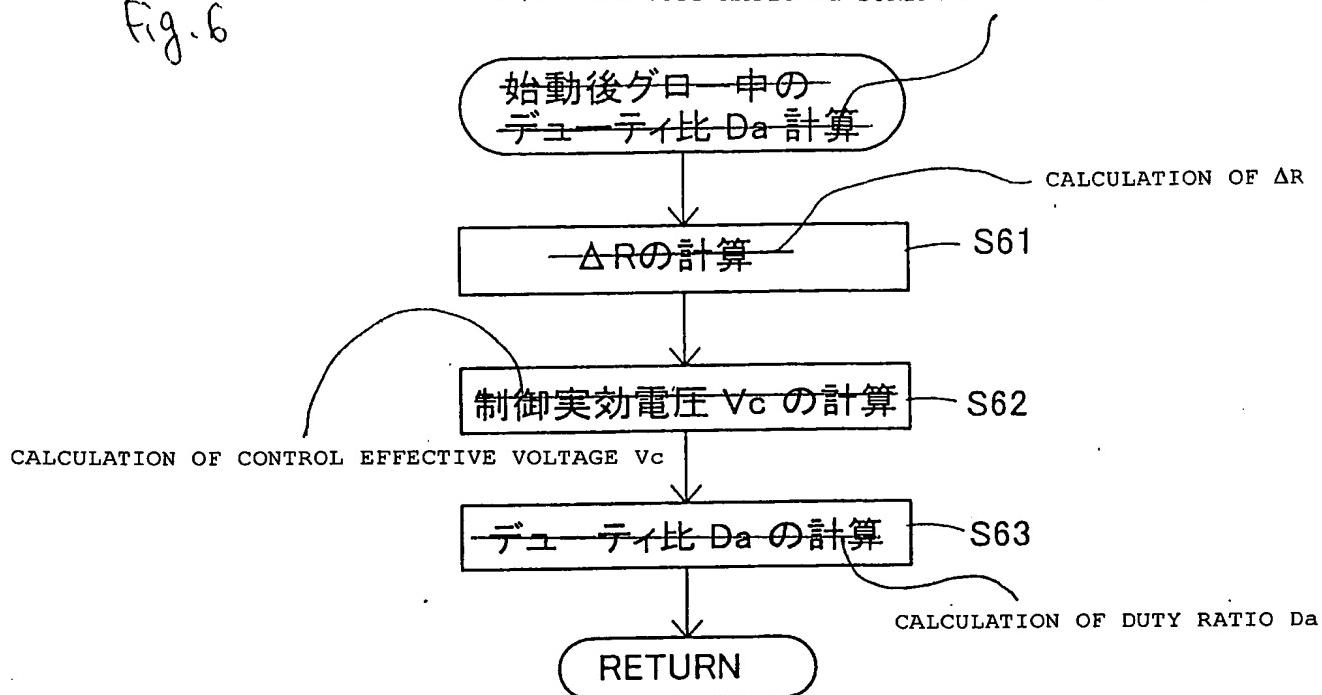

【図7】


Fig.7

## CRANKING GLOW PROCESSING

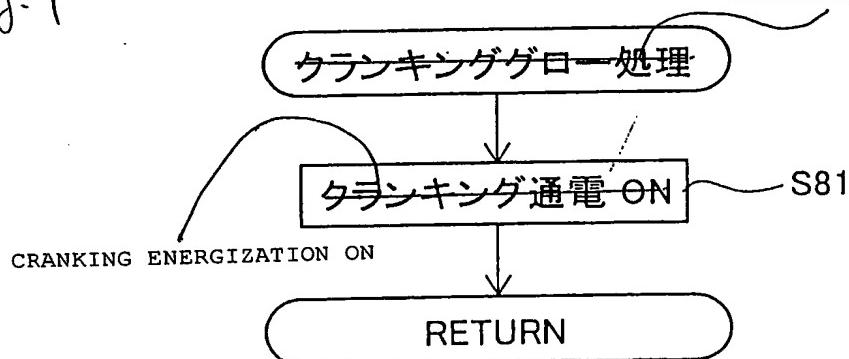


【図8】

Fig.8

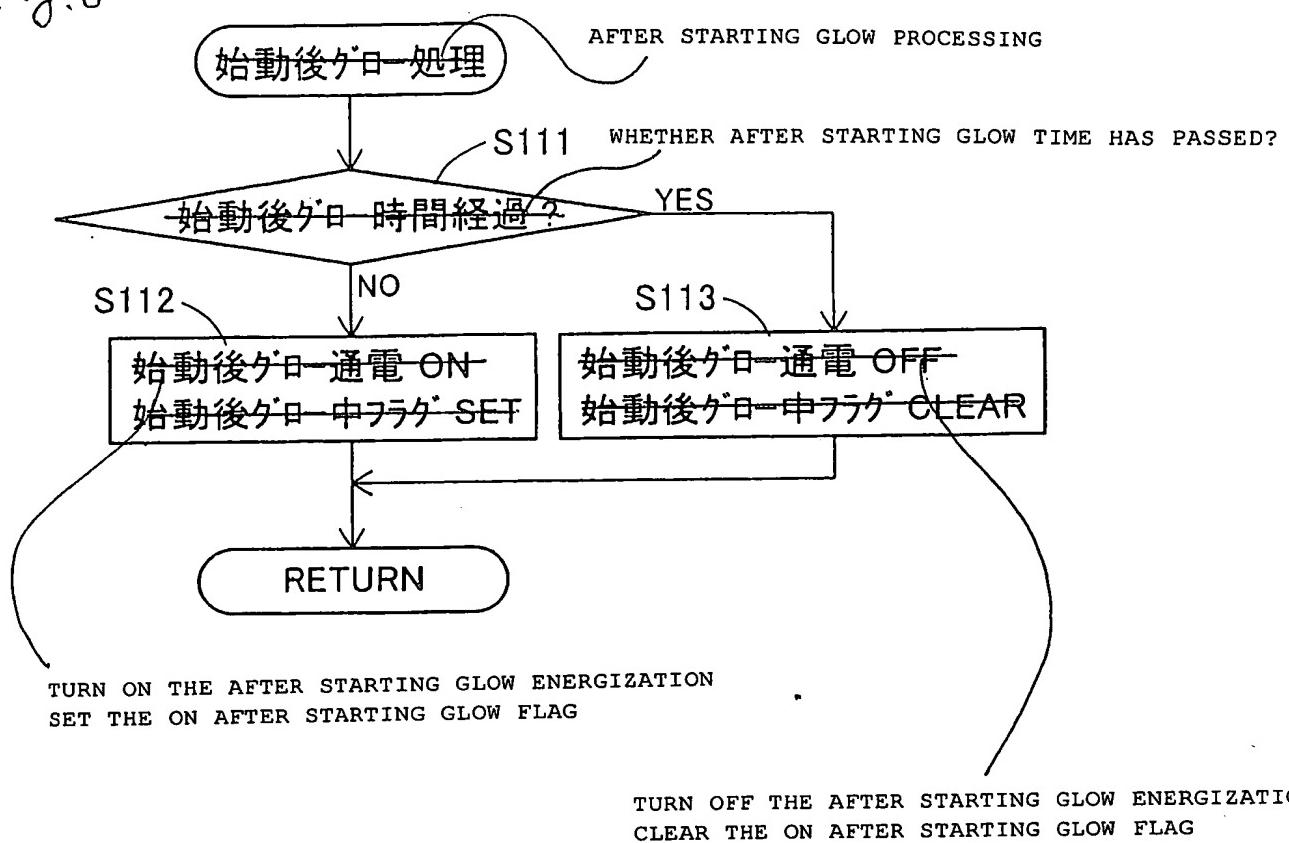

【図9】


Fig.9

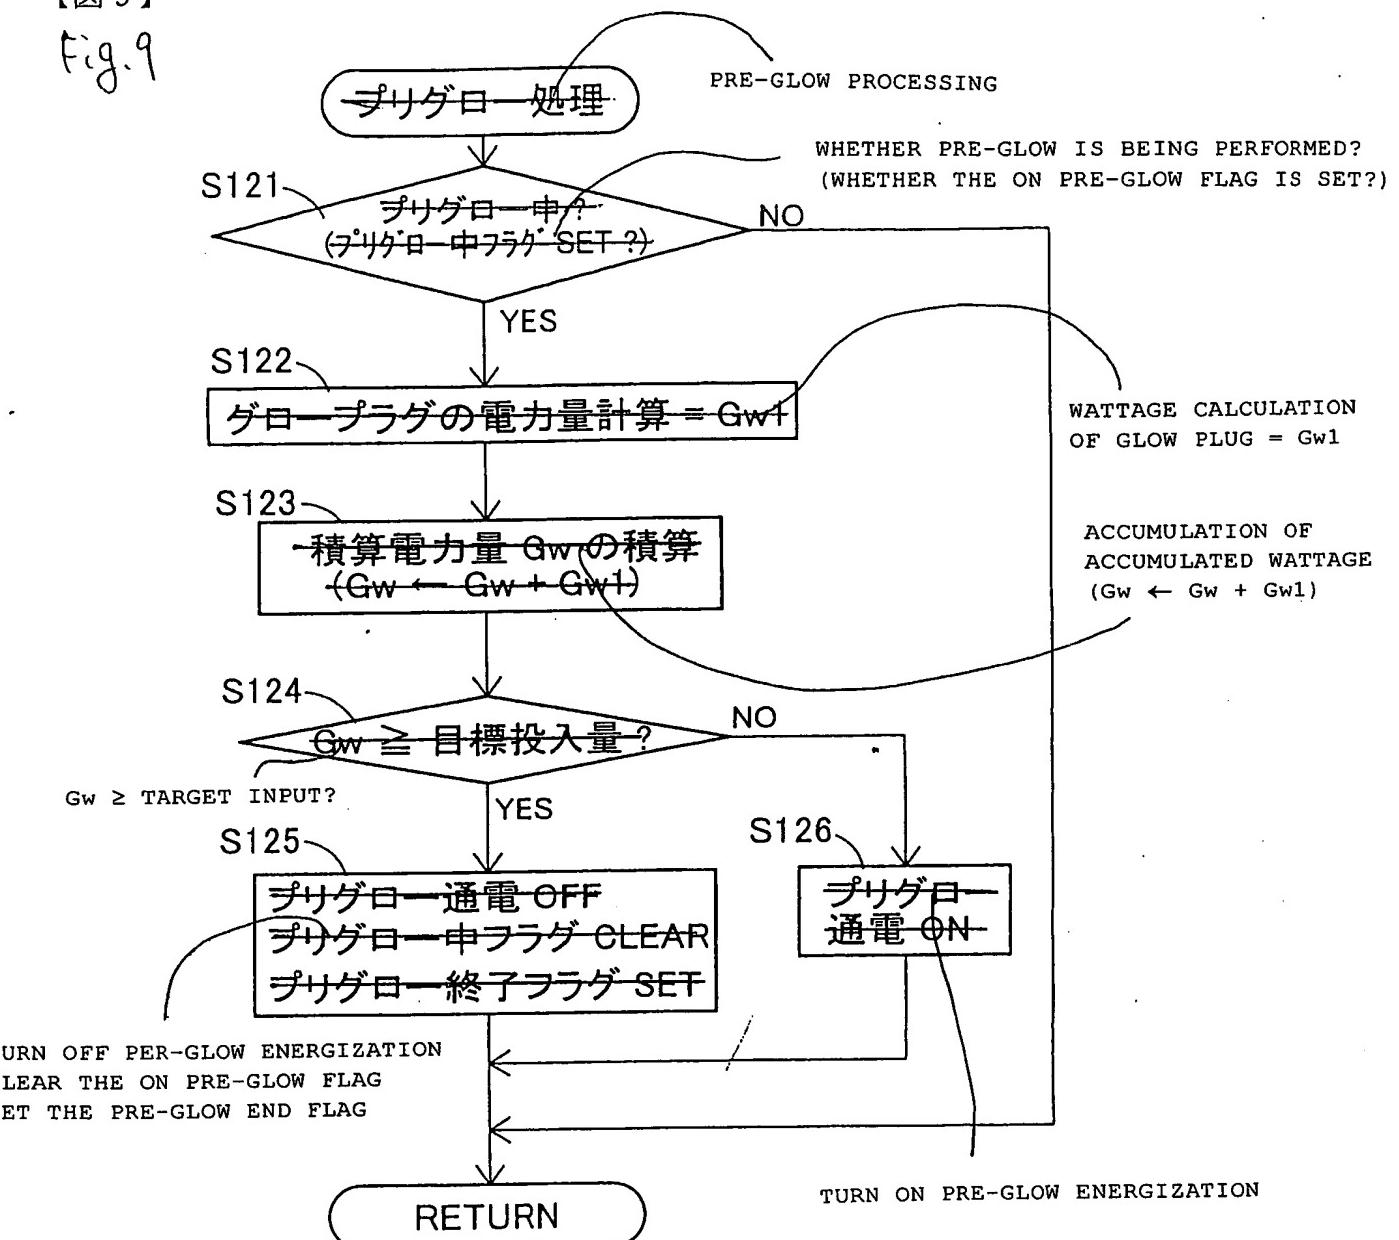

整理番号=NT101456-1

— [ 10 ] —

Fig.-10

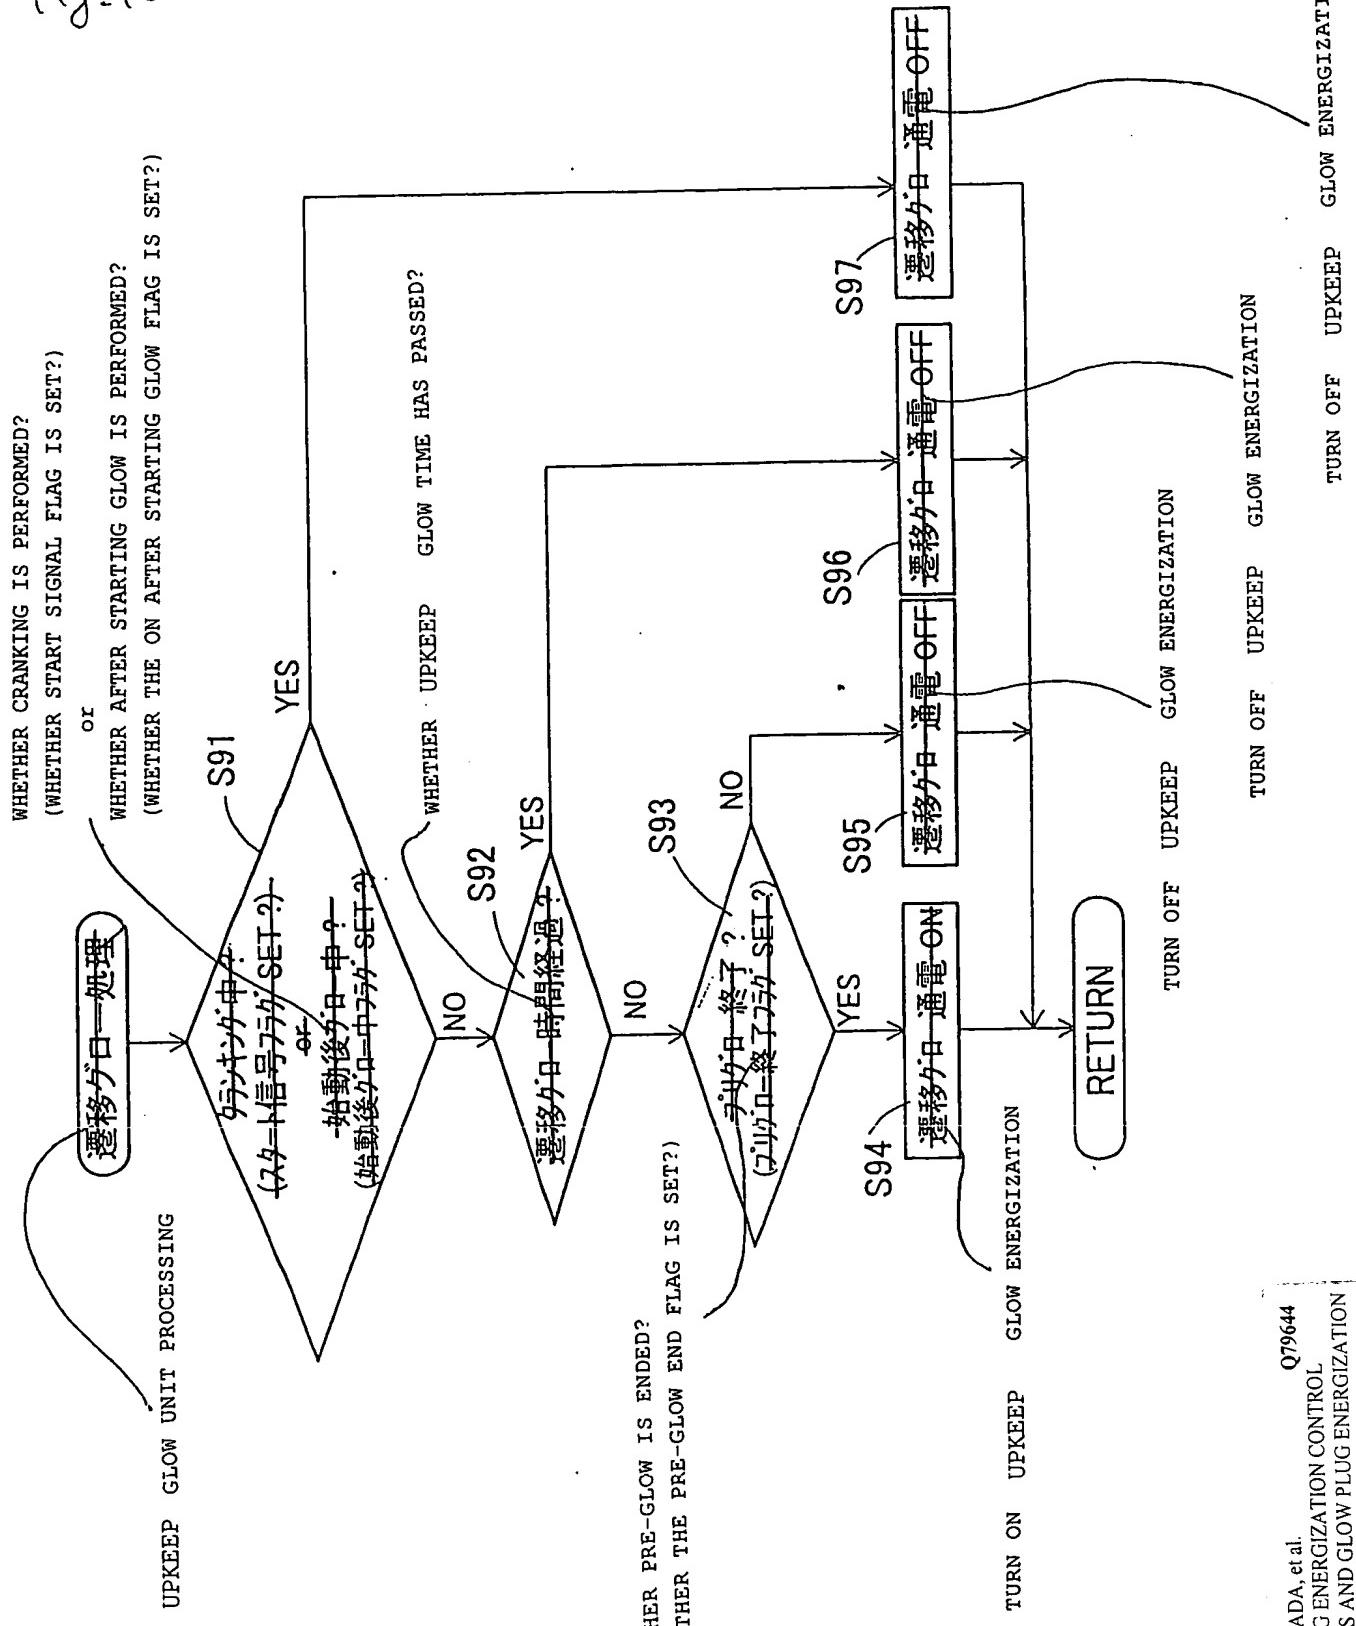

Chiaki KUMADA, et al.  
GLOW PLUG ENERGIZATION CONTROL  
APPARATUS AND GLOW PLUG ENERGIZATION  
CONTROL METHOD  
Q79644  
Filing Date: January 28, 2004  
Darryl Mexic 202-293-7060  
9 OF 10

[図11]

Fig.11

